


# Commercial Aluminium Stair Tread

- Utilises high strength, heat treated aluminium alloy for extra durability
- Heavy duty design with anti slip tread for commercial stairways
- Suitable for both indoor and outdoor applications
- UV and water resistant
- Complies with Safety Standard AS/NZ 4586

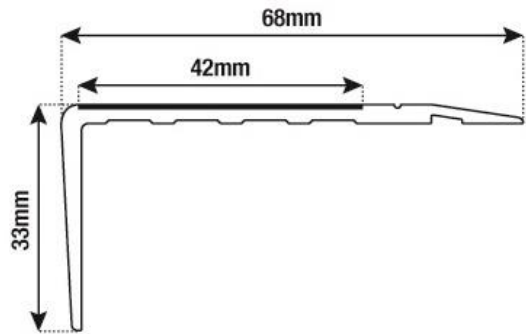

|                                                  |                |          |                                   |               |                                  |              |                |              |                        |               |
|--------------------------------------------------|----------------|----------|-----------------------------------|---------------|----------------------------------|--------------|----------------|--------------|------------------------|---------------|
| ALLOY: 6063                                      |                |          | TEMPER: T5                        |               |                                  |              |                |              |                        |               |
| CHEMICAL CONTENT                                 |                |          |                                   |               |                                  |              |                |              |                        |               |
| STANDARD                                         | SILICONE (%)   | IRON (%) | COPPER (%)                        | MANGANESE (%) | MAGNESIUM (%)                    | CHROMIUM (%) | ZINC (%)       | TITANIUM (%) | OTHER (each 0.05%) (%) | ALUMINIUM (%) |
| (DIN/BS) EN 573-3:1994<br>(DIN/BS) EN 755-2:1997 | 0.20–0.60      | 0.35     | 0.1                               | 0.1           | 0.45–0.90                        | 0.1          | 0.1            | 0.1          | 0.15                   | Rem           |
| MECHANICAL PROPERTY                              |                |          |                                   |               |                                  |              |                |              |                        |               |
| STANDARD                                         | DIMENSION (mm) |          | 0.2% Proof Stress minimum (N/mm²) |               | Tensile Strength minimum (N/mm²) |              | Elongation (%) |              | Elongation on 50mm (%) |               |
| (DIN/BS) EN 573-3:1994<br>(DIN/BS) EN 755-2:1997 | <=3            |          | 130                               |               | 175                              |              | 8              |              | 6                      |               |
|                                                  | 3<=25          |          | 110                               |               | 160                              |              | 7              |              | 5                      |               |

| Colour |                           | Size      | Code       | Pk Qty |
|--------|---------------------------|-----------|------------|--------|
|        | Matt Silver               | 1m x 68mm | AST1.68MS  | 10     |
|        | Matt Silver               | 3m x 68mm | AST3.68MS  | 10     |
|        | Matt Silver with Adhesive | 1m x 68mm | AST1.68MSA | 10     |